



# Pioneer® PJX Series

Carat and Gold Jewelry Balances



## *Modern Compact Jewelry Balances for Accurate Weighing of Precious Metals and Stones*

The PJX Series offers a range of Jewelry Balances for weighing precious metals and stones in a variety of capacities and readabilities. The PJX Series is OIML-approved and ideal for legal-for-trade applications. The PJX features an auxiliary display that can be easily connected to provide simultaneous viewing of results for both trader and customer. Select models come with a built-in internal adjustment system.


### *Standard Features Include:*

- **Backlit LCD and Auxiliary Display Available for Clear Viewing of Weighing Results**  
The PJX features a bright backlit LCD which displays results clearly. An auxiliary display can also be connected to allow both customer and trader to view weighing results simultaneously.
- **Compact Modern Design Fits Right on the Workspace**  
The PJX Series comes in a modern compact design, which is designed with saving space in mind. Additionally, keeping the draftshield lowered will help to get more stable weighing results.
- **Ideal for Legal-for-Trade Applications with OIML Approvals**  
Select PJX models come with a built-in internal adjustment system, which calibrates the balance automatically, ensuring weighing accuracy at all times.
- **Equipped with Density Determination Mode for Accurate Pricing**  
The PJX features four weighing modes, including the Density Determination mode, which allows the user to test the density of unknown materials, and determine the type of material and its cost accurately.

# Pioneer® PJX Series Carat Jewelry Balances

Durably constructed of cast metal lower housing, metal sub-pan and stainless steel weighing pan for long-term use.

Large viewing angle with bright backlit LCD display.

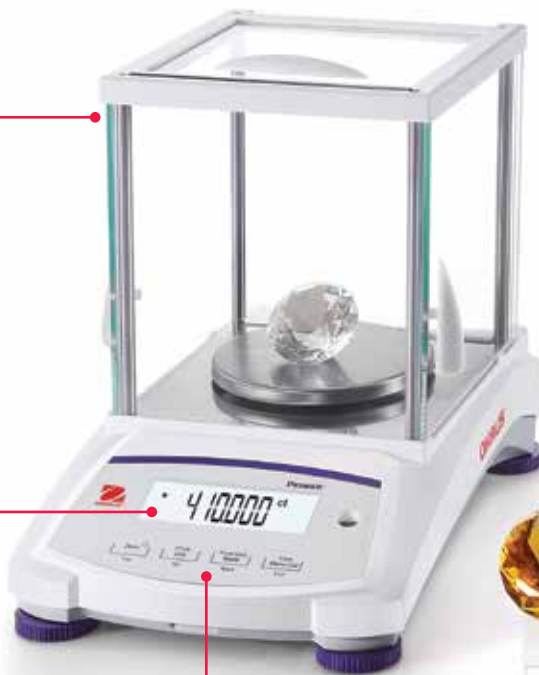

An auxiliary display can be easily connected to provide simultaneous viewing of results for both trader and customer.



Connectivity options include standard RS232 to connect a printer, and Mini DIN port to connect to an auxiliary display.



Four quick keys enable easy operation of weighing modes, including the Density Determination mode.



Carat Balances					
InCal™ Model	PJX203	PJX803	PJX1203	PJX1603	PJX2503
ExCal Model	PJX203/E	PJX803/E	PJX1203/E	PJX1603/E	PJX2503/E
Approved Models	PJX203M	PJX803M	PJX1203M	PJX1603M	PJX2503M
Capacity (ct)	200	800	1200	1600	2500
Readability (ct)	0.001			0.005	
Capacity (g)	40	160	240	320	500
Readability (g)	0.0001			0.001	
Approved Verification Interval (e) (g)	0.001			0.01	
Repeatability (STDEV) (g)	0.0001			0.001	
Linearity (g)	0.0002			0.002	
Class for Approved Models	II	I		II	
Stabilization Time (s)	3				
Sensitivity Temperature Drift (PPM/K)	± 3				
Units	Milligram, Gram, Kilogram, Ounce, Pound, Carat, Pennyweight, Ounce Troy				
Applications	Basic Weighing, Parts Counting, Percent Weighing, Density Determination				
Pan Size	90 mm			120 mm	
Power Supply	Power Input: 100–240V ~ 200mA 50–60Hz 12–18VA Power Output: 12 VDC 0.5A				
Assembled Dimensions (W × D × H)	209 × 321 × 274 mm				
Communication	RS232 and Mini DIN				
Operating Temperature Range	10 °C to 30 °C				
Net Weight	4.5 kg				
Shipping Weight	7 kg				
Shipping Dimensions (W × D × H)	507 × 387 × 531 mm				

# Pioneer® PJX Series Gold Jewelry Balances

Large viewing angle with bright backlit LCD display.



An auxiliary display can be easily connected to provide simultaneous viewing of results for both trader and customer.



Connectivity options include standard RS232 to connect a printer, and Mini DIN port to connect to an auxiliary display.

Four quick keys enable easy operation of weighing modes, including the Density Determination mode.




## Gold Balances

InCal™ Model	PJX822	PJX1602	PJX2202	PJX4202	PJX5202	PJX2201	PJX4201	PJX6201
ExCal Model	PJX822/E	PJX1602/E	PJX2202/E	PJX4202/E	PJX5202/E	PJX2201/E	PJX4201/E	PJX6201/E
Approved Models	PJX822M	PJX1602M	PJX2202M	PJX4202M	PJX5202M		PJX4201M	
Capacity (g)	820	1600	2200	4200	5200	2200	4200	6200
Readability (g)	0.01			0.1				
Approved Verification Interval (e) (g)	0.1			0.1				
Repeatability (STDEV) (g)	0.01			0.1				
Linearity (g)	0.02			0.2				
Class for Approved Models	II							
Stabilization Time (s)	2			1				
Sensitivity Temperature Drift (PPM/K)	± 6		± 3		± 6	± 3	± 10	
Units	Milligram, Gram, Kilogram, Ounce, Pound, Carat, Pennyweight, Ounce Troy							
Applications	Basic Weighing, Parts Counting, Percent Weighing, Density Determination							
Pan Size	180 mm							
Power Supply	Power Input: 100–240V ~ 200mA 50–60Hz 12–18VA Power Output: 12 VDC 0.5A							
Assembled Dimensions (W × D × H)	209 × 321 × 98 mm							
Communication	RS232 and Mini DIN							
Operating Temperature Range	10 °C to 30 °C							
Net Weight	3.5 kg							
Shipping Weight	5 kg							
Shipping Dimensions (W × D × H)	550 × 385 × 291 mm							

# Pioneer® PJX Series Carat and Gold Jewelry Balances

## Dimensions

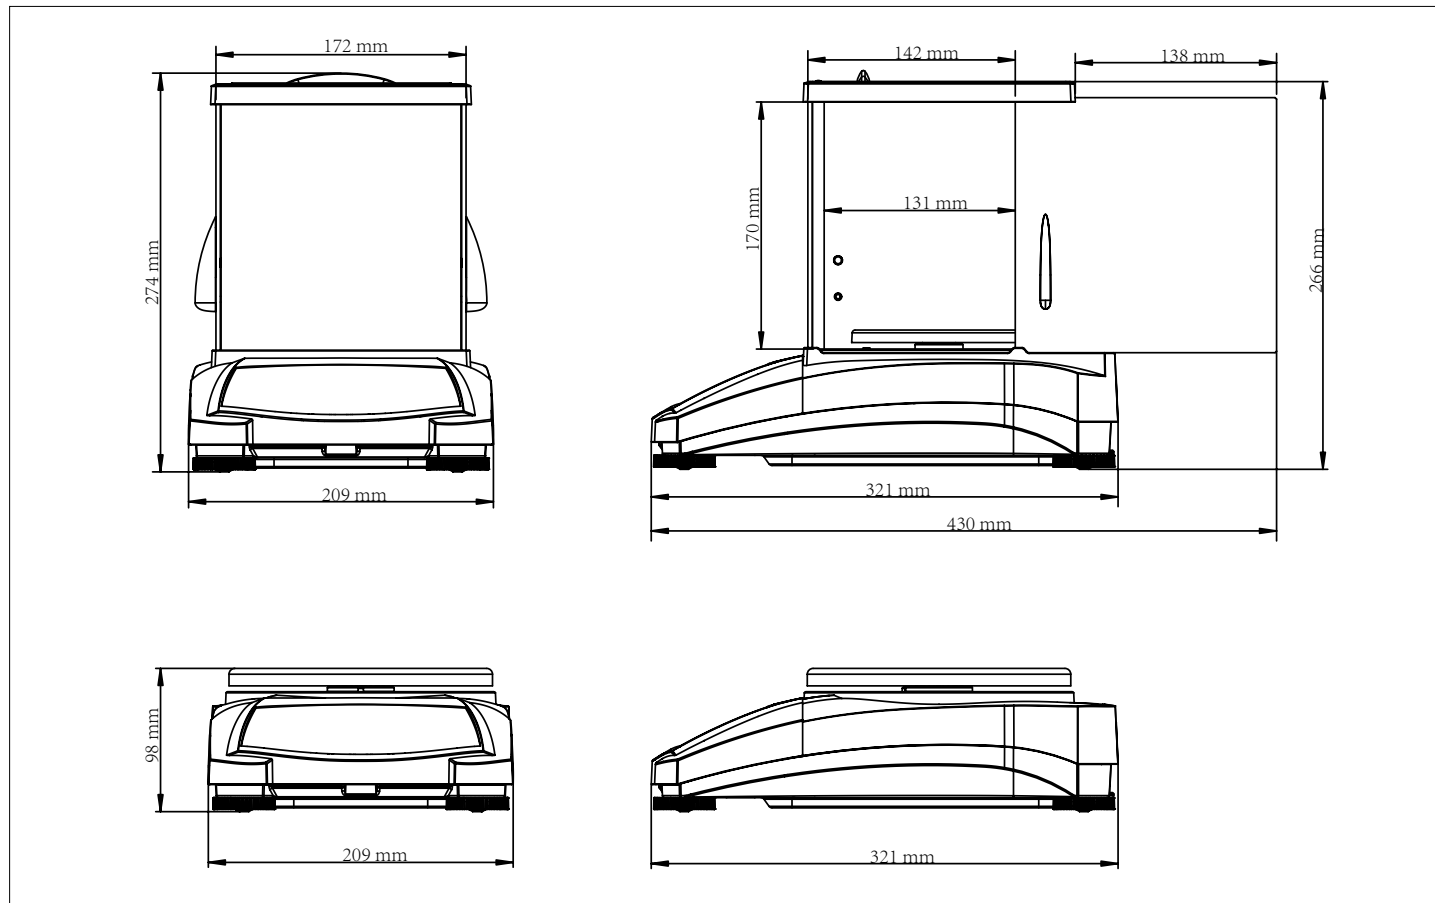

## Other Standard Features and Equipment

Metal base, plastic top housing, removable stainless steel pan, removable glass draftshield or side doors, integrated weigh-below-hook, security bracket, calibration lock and in-use cover, user-selectable environmental filters and brightness settings, auto-tare, auto-dim, user-selectable span calibration points, software lockout and reset menu, user-selectable communication settings and data print options, user-definable project and user IDs, software overload/underload indicator, stability indicator

## Compliance

- **Metrology (PR...M...models only):** OIML R76; EN 45501
- **Product Safety:** IEC/EN 61010-1; CAN/CSA C22.2 61010-1; UL 61010-1
- **Electromagnetic Compatibility:** IEC/EN 61326-1 Class B, Basic Environments; FCC Part 15 Class A; Canada ICES-003 Class A
- **Compliance Marks:** CE; CSA

## Accessories

Auxiliary Display .....	30472063
Density Kit for Solids .....	80253384
Sinker Glass for Density Determination .....	83034024
Printer SF40A .....	30064202
SF40A Ink Ribbon Cassette .....	12120798
USB Interface Cable .....	83021085
SF40A Paper Roll, 57.5 mm (2 Rolls) .....	12120799
Security Device .....	80850043
In-use Cover .....	30372546
Dust Cover .....	30093334
RS232 Cable (9-pin) .....	00410024
Interface Cable, USB (Type A to B) .....	83021085

OHAUS Europe GmbH  
Im Langacher 44  
8606 Greifensee  
Switzerland

e-mail: [ssc@ohaus.com](mailto:ssc@ohaus.com)  
Tel: 0041 22 567 53 19  
e-mail: [tsc@ohaus.com](mailto:tsc@ohaus.com)  
Tel: 0041 22 567 53 20

[www.ohaus.com](http://www.ohaus.com)

*The management system  
governing the manufacture  
of this product is  
ISO 9001:2015 certified.*

CH16E051

