



Bench meters

Simplify your dissolved oxygen analysis

Orion Lab Star DO113 DO bench meters

Measure dissolved oxygen using the Orion Lab Star DO113 Bench Meter.

Benefits

- Budget-friendly meter for simplified dissolved oxygen testing
- Large 5" backlit display makes viewing measurements easy
- Small meter footprint saves valuable lab bench space
- Date and time stamped logs support GLP compliance
- View active calibration logs with date and time to help ensure accuracy
- 500-point data log with date and time to track critical measurements
- Output data and calibration logs to a printer or computer for long-term data storage

The Thermo Scientific™ Orion™ Lab Star DO113 Dissolved Oxygen Bench Meter is ideally suited for laboratories with users of varying levels of technical expertise and who require a simple-to-calibrate and use meter for routine dissolved oxygen testing. Scientists have trusted Thermo Scientific Orion Lab Products for over 60 years to provide them with accurate and reliable analytical testing instruments in the lab and in the field.

Measure dissolved oxygen as percent saturation, concentration in mg/L or concentration in ppm simultaneously with temperature using the Orion Lab Star DO113 DO Bench Meter. To enable comprehensive measurement capabilities, measure dissolved oxygen in a range of 0.0 to 300.0 % saturation, 0.00 to 30.0 mg/L or ppm and measure temperature in a range of -5.0 to 105.0 °C or 23.0 to 221.0 °F.


For proficient SOP compliance, perform 100% saturation, 0% saturation and custom concentration calibrations for dissolved and one-point temperature adjustment calibrations.

Featuring a large, backlit display for easy viewability and small footprint to save bench space, this dissolved oxygen meter is ideally suited for simplified, budget-friendly lab testing. Use the onscreen stabilizing and ready indicators to help identify when DO meter readings are complete.

View active dissolved oxygen and temperature calibration logs with date and time stamp to ensure accurate, reproducible measurements. Record key measurements using the 500-point data log with date and time stamp. Output data logs and calibration logs to a printer or computer for long-term data storage.

Orion Lab Star DO113 DO bench meters

Product feature highlights

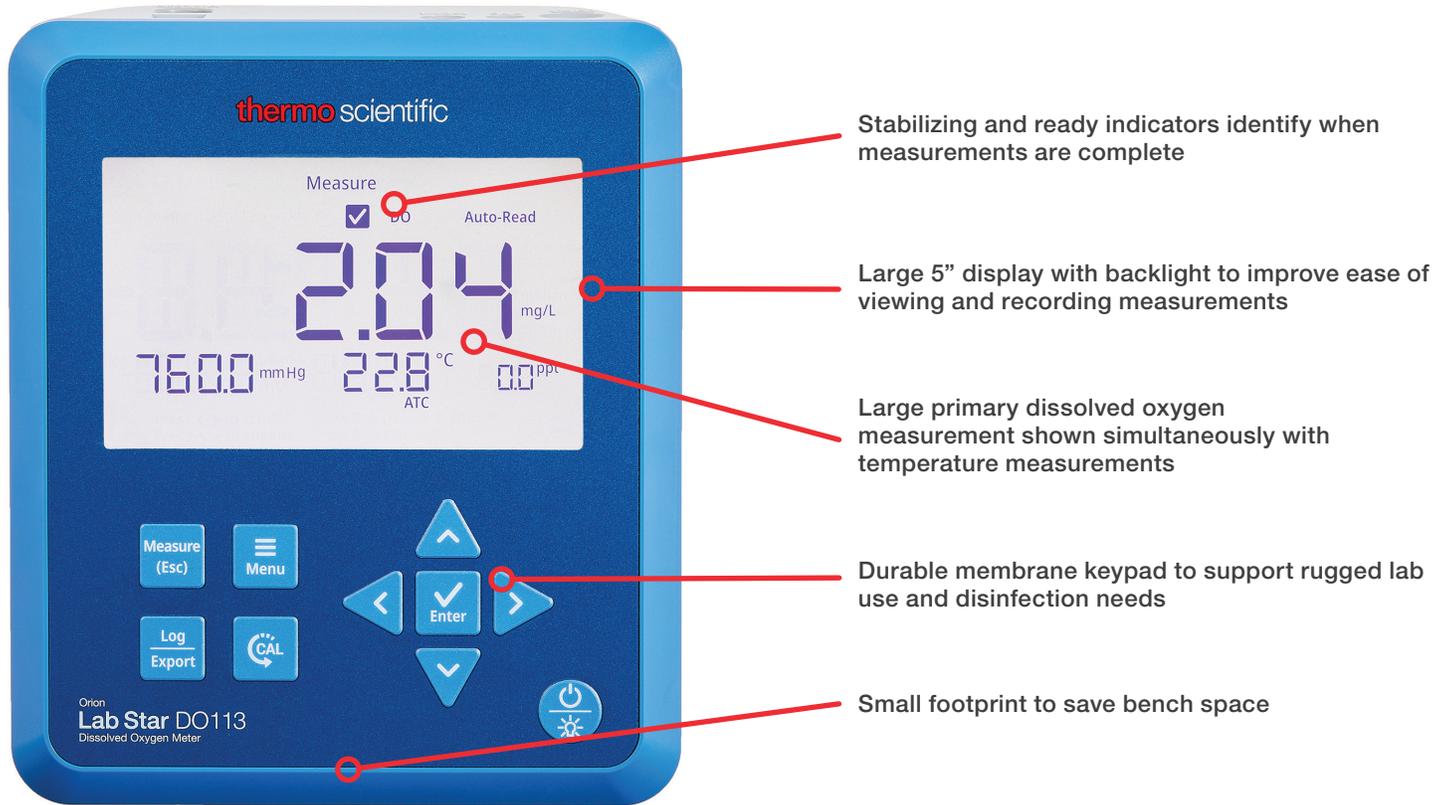



Orion Lab Star DO113 DO bench meters

Product specifications

Parameter	Description
Dissolved oxygen as percent saturation	
Range	0.0 to 300.0 % saturation
Resolution	0.1, 1 % saturation
Relative accuracy	±2 % saturation ± 1 LSD
Calibration types	100 % and 0 %
Barometric pressure compensation	400.0 to 850.0 mmHg; 0.533 to 1.133 bar
Salinity compensation	0.0 to 50.0 ppt
Dissolved oxygen as concentration	
Units	mg/L or ppm
Range	0.00 to 30.0 mg/L or ppm
Resolution	0.01, 0.1 mg/L or ppm
Relative accuracy	±0.02 mg/L or ppm ± 1 LSD
Calibration points	1 point, custom value
Barometric pressure compensation	400.0 to 850.0 mmHg; 0.533 to 1.133 bar
Salinity compensation	0.0 to 50.0 ppt
Temperature	
Range	-5.0 to 105.0 °C, 23.0 to 221.0 °F
Resolution	0.1 °C, 0.1 °F
Relative accuracy	±0.3 °C, ±0.5 °F
Calibration points	1 point
Offset adjustment	Up to ±5 °C
Features	
Display	5" backlit LCD
Time and date	Yes
Time format	12 hour AM/PM or 24 hour
Date format	Selectable, DD-MM-YYYY or MM-DD-YYYY
Read types	Continuous, Auto-Read, Timed
Timed interval	5 seconds to 60 minutes
Data log	500 sets with time and date
Calibration log	Active dissolved oxygen, temperature with time and date
Calibration alarm	Yes, 1 to 168 hours or off
Sleep mode	Yes, optional
Self-test	Automatic with startup
Memory	Non-volatile
Input	9-pin MiniDIN
Data output	Computer or printer
Data output format	CSV or print
Warranty	3 years
Certifications	CE, cTUVus, FCC Class B, CES-001, KC, RCM
Enclosure	IP-54
Power	100-240 VAC, 50-60Hz, 9 DC adapter, 1.3A
Dimensions (L x W x H)	187.2 mm x 155.2 mm x 61.7 mm, 7.37" x 6.11" x 2.43"
Weight	700 grams, 1.54 lbs.

Parameter	Description
Environmental conditions	
Environmental conditions	Indoors
Altitude	Up to 2,000 Meters
Operating temperature	5°C to 45°C
Operating relative humidity	5 to 85%, non-condensing
Storage temperature	-20°C to 60°C
Storage relative humidity	5 to 85%, non-condensing
Mains fluctuation	±10% of range (100-240VAC)
Installation category	II
Pollution degree	2
Protection class	III

Meter dimensions

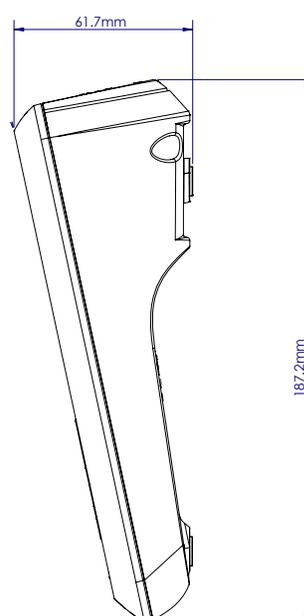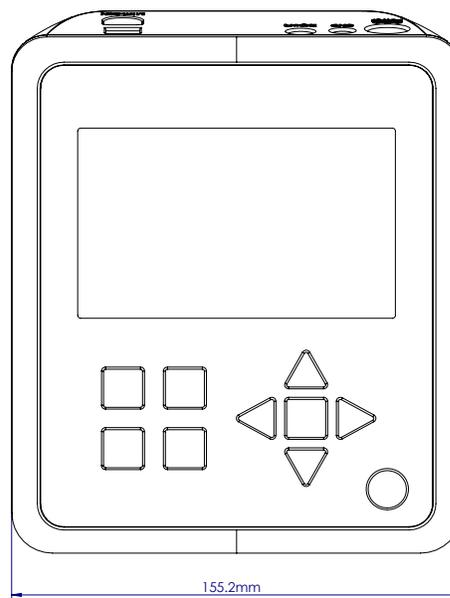

Orion Lab Star Meter and Meter kit options

Select catalog number **LSTAR1130** for the DO meter and stand option, which allows you to purchase your DO electrode separately.

Select catalog number **LSTAR1135** for the standard DO meter kit option, for a wide variety of dissolved oxygen samples including BOD with the included adapter.



Ordering Information

Description	Cat. No.
Thermo Scientific Orion Lab Star DO113 DO Bench Meter with electrode stand, PC cable and universal power adapter	LSTAR1130
Thermo Scientific Orion Lab Star DO113 DO Bench Meter standard kit, includes meter with electrode stand, PC cable, universal power adapter, 083005MD polarographic DO/ATC probe with calibration sleeve, 080513 DO probe maintenance kit, 080360 BOD adapter	LSTAR1135
Thermo Scientific Orion Electrode Arm with meter-attached bracket for Orion Lab Star meters	LSTAR-ARM
Thermo Scientific Orion Twist-and-Lock Universal Power Adapter for Orion Lab Star meters; 100-240V, 50/60Hz	LSTAR-PWR
Thermo Scientific Orion USB Computer Cable for Orion Lab Star meters	LSTAR-USB
Thermo Scientific Orion Dust Cover for Orion Lab Star meters	LSTAR-CVR
Thermo Scientific Orion Compact Ink-ribbon Printer for Orion Lab Star meters; 100-240V, 50/60Hz	STARA-106
Thermo Scientific Orion Replacement Ink Ribbon for compact printer, 6 pack	STARA-108
Thermo Scientific Orion Replacement Paper for compact printer, 5 pack	STARA-109

Learn more at thermofisher.com/electrochemistry

thermoscientific

For Laboratory Use. It is the customer's responsibility to ensure that the performance of the product is suitable for customers' specific use or application. © 2022 Thermo Fisher Scientific Inc. All rights reserved. All trademarks are the property of Thermo Fisher Scientific and its subsidiaries unless otherwise specified. **EXT3268 0722**